


Isolation Link



ERMCO Components
1607 Industrial Road
Greeneville, TN 37745
Phone: (423) 638-2302
Toll Free: (877) 267-1855
Fax (423) 636-6492

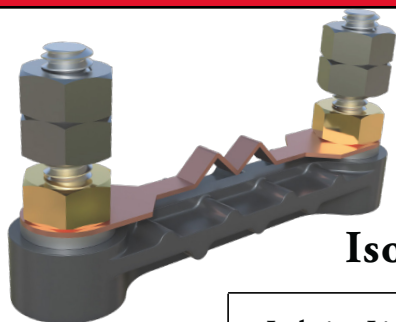

Isolation Link Part Numbers

Isolation Link Catalog Number	Curve Number GES 8900
7580ZB0299E	A1
7580ZB0399E	A2
7580ZB0499E	A3
7580ZB0599E	A5
7580ZB0699E	A6
7580ZB0799E	A7

Ordering Information


Use the chart below to cross-reference the Isolation Link required for the fuse element.

Fuse Combination		
Fault Sensing Fuse Link Coordination		
Fuse Link Catalog Number	Isolation Link Catalog Number	Curve Number GES 8900
9F54MFC040	7580ZB0299E	A1
9F54MFC060	7580ZB0399E	A2
9F54MFC080	7580ZB0399E	A2
9F54MFC100	7580ZB0499E	A3
9F54MFC120	7580ZB0499E	A3
9F54MFC140	7580ZB0499E	A3
9F54MFC160	7580ZB0599E	A5
9F54MFC170	7580ZB0599E	A5
Load Sensing Fuse Link		
9F54LFC030	7580ZB0299E	A1
9F54LFC050	7580ZB0399E	A2
9F54LFC080	7580ZB0499E	A3
9F54LFC100	7580ZB0599E	A5
9F54LFC120	7580ZB0699E	A6
N/A	7580ZB0799E	A7
Dual Element Fuses		
9F54DFC030	7580ZB0299E	A1
9F54DFC040	7580ZB0299E	A1
9F54DFC050	7580ZB0399E	A2
9F54DFC060	7580ZB0399E	A2
9F54DFC070	7580ZB0399E	A2
9F54DFC090	7580ZB0499E	A3
9F54DFC110	7580ZB0499E	A3
9F54DFC120	7580ZB0499E	A3
9F54DFC140	7580ZB0599E	A5

General Information


The **Isolation Link** is used in series with Bay-O-Net type expulsion fuses to provide extra protection during re-fusing operations.

They are coordinated to operate at currents that exceed the one-shot rating of the expulsion fuse used in pad or vault type transformers. The isolation link will melt during transformer failure, so the opened primary circuit of a failed transformer cannot be re-energized by the line crew.

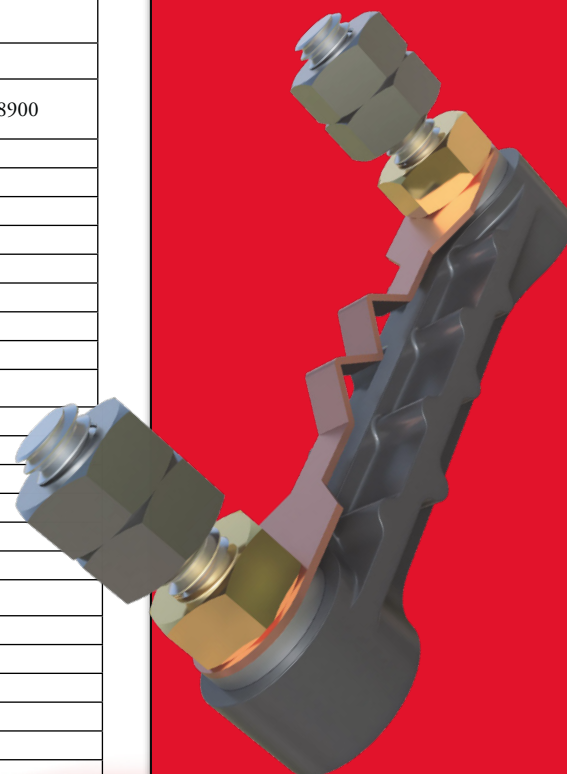

For more information contact
Componentssupport@ermco-eci.com
or call (423)638-2302


www.ermco-eci.com

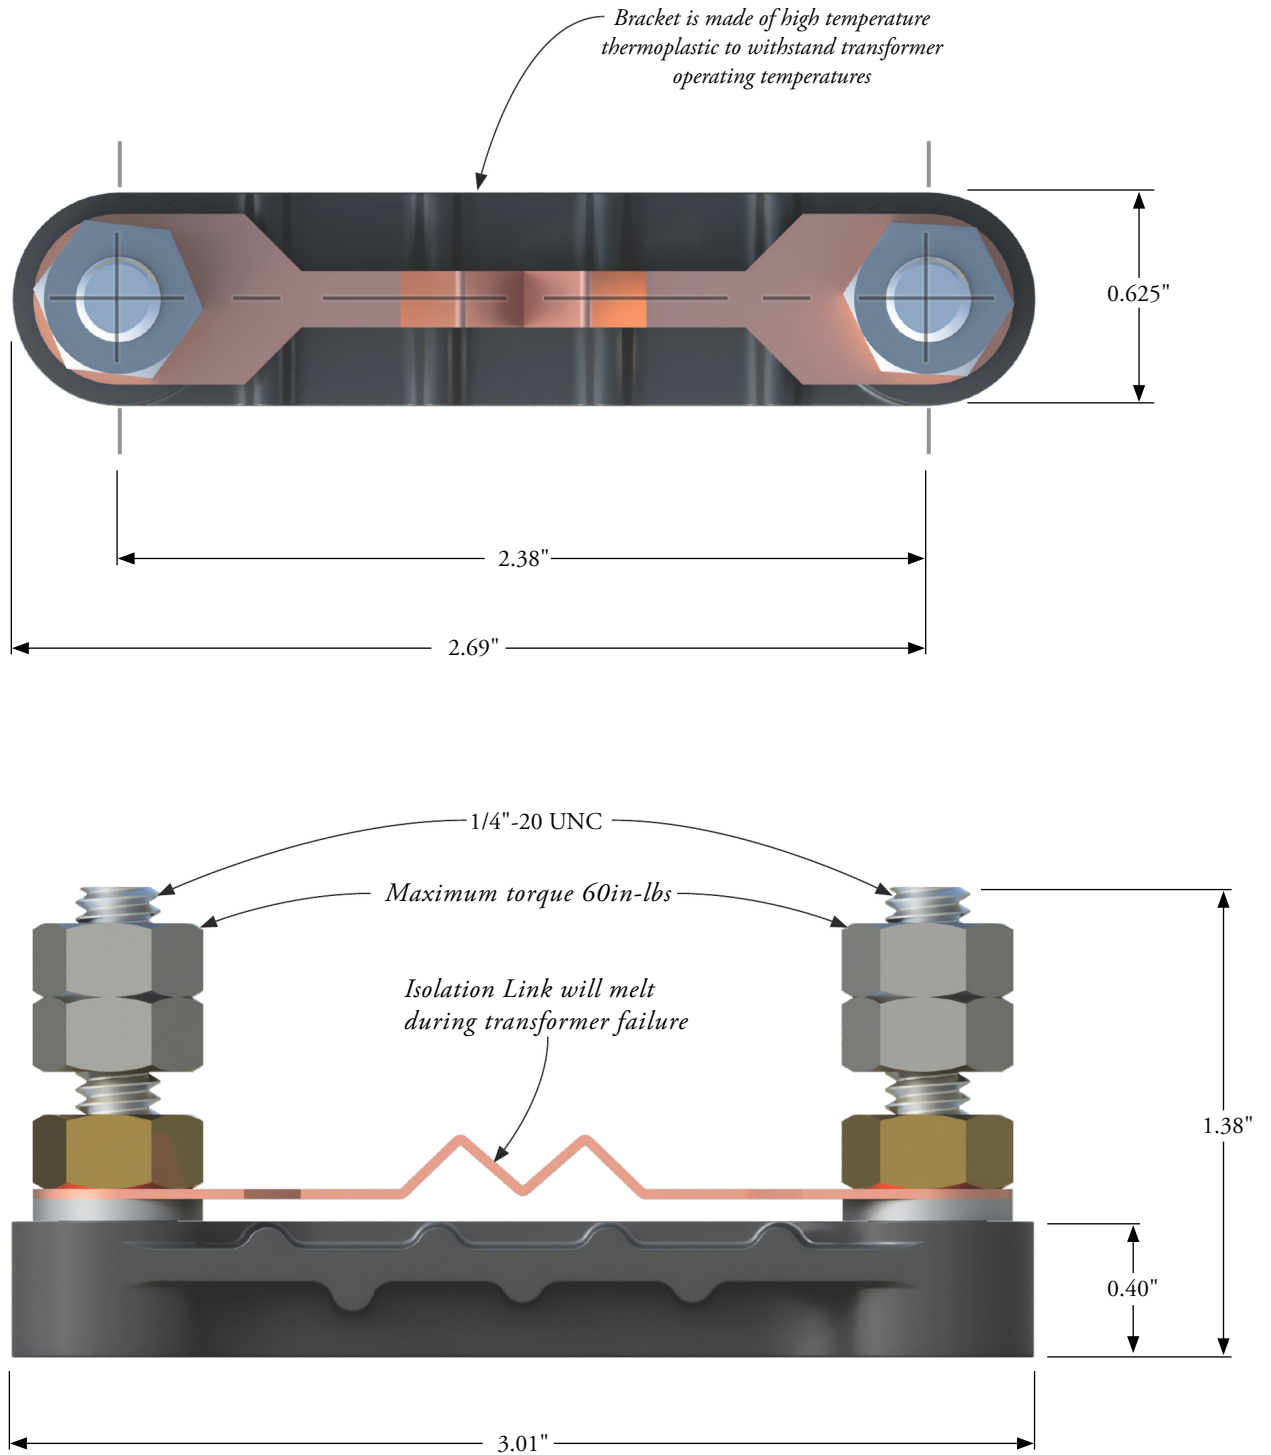

Installation

No special tools are required. Isolation links are bolted onto the Bay-O-Net fuse assemblies in series between the primary transformer bushing and primary coil.

Isolation Fuse Link (Minimum Melting Time Current Curves)

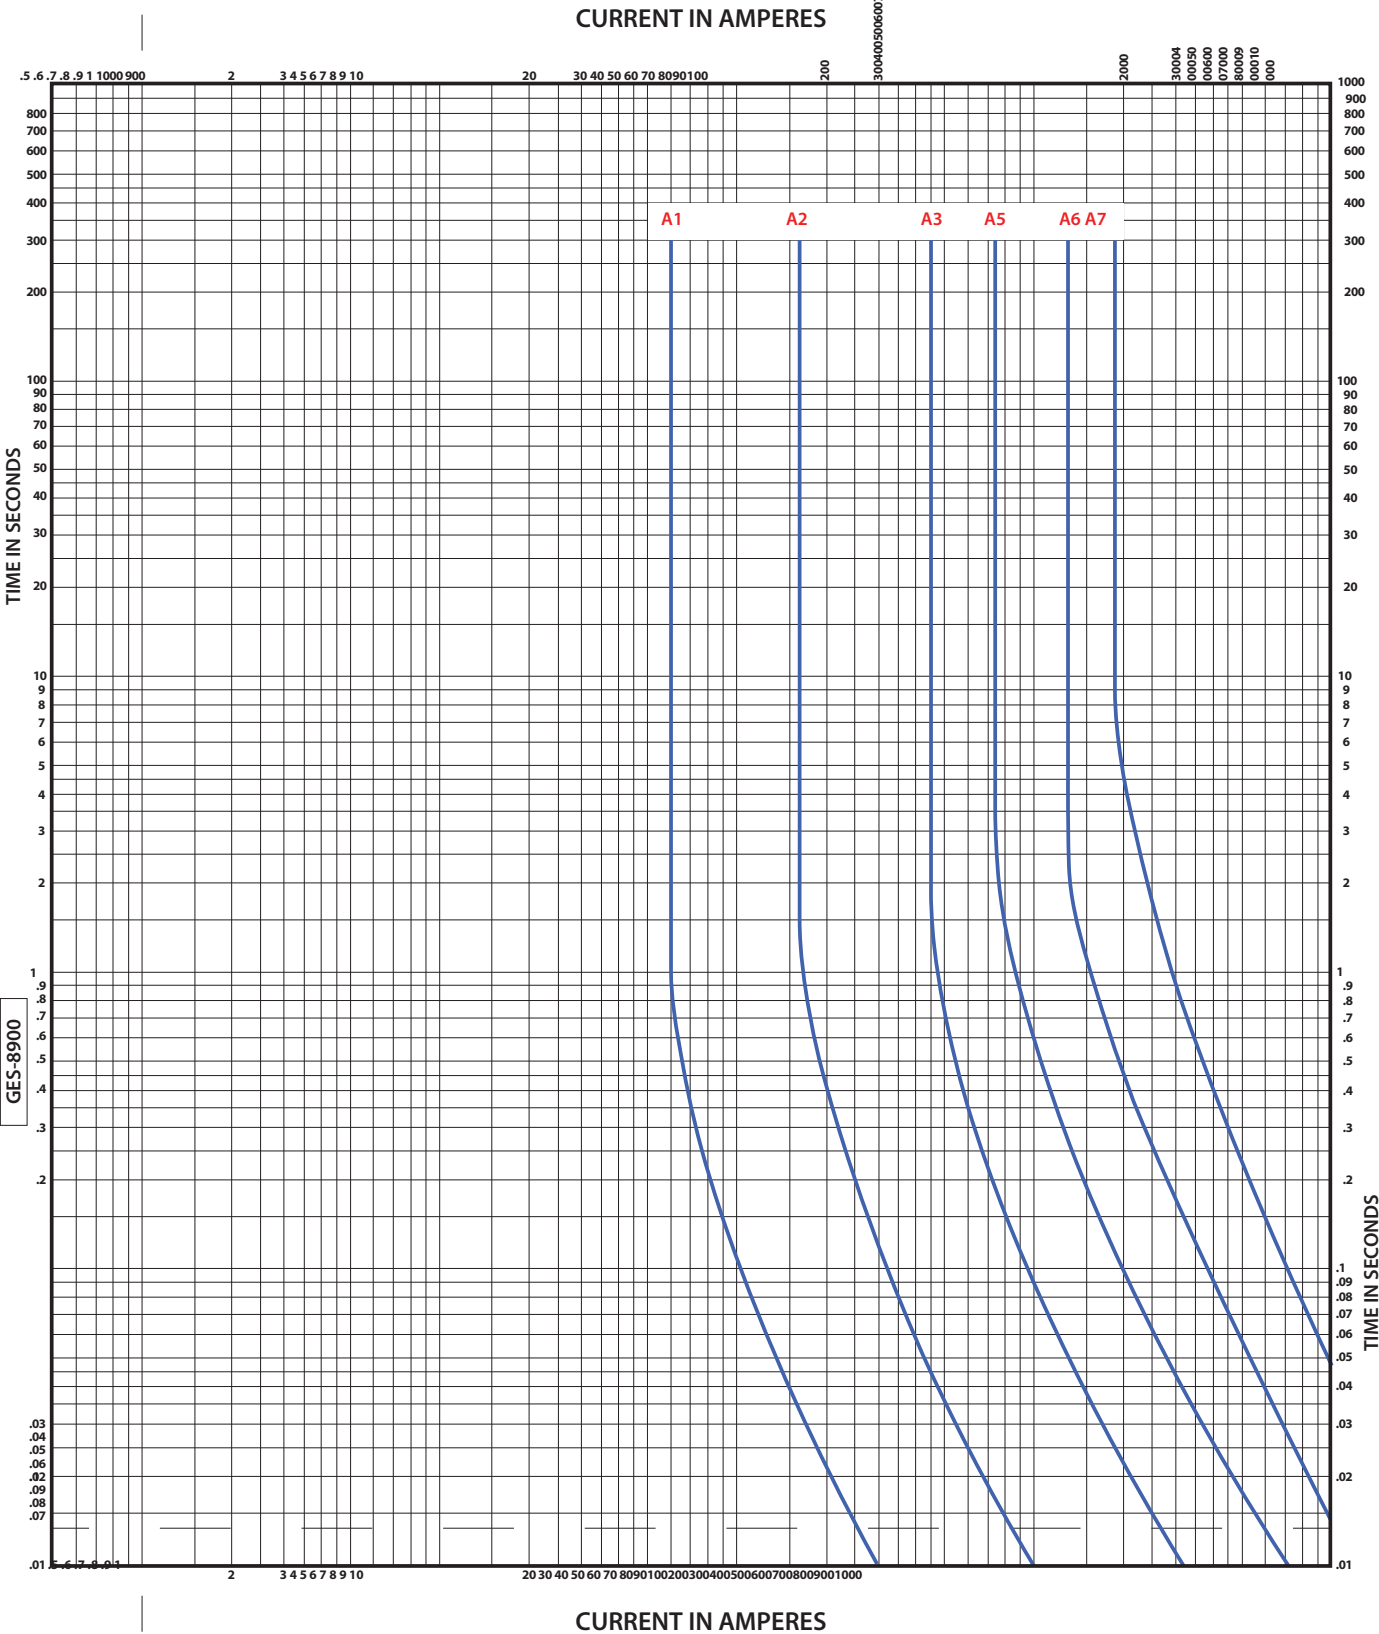

ISOLATION FUSE LINK
2561K011 G01 TO G07 INCLUDED
Minimum-melting Time-current Curves

GES-8900

Current Ratings
Limits as Indicated

(TESTS MADE AT 60 HZ AND LOW VOLTAGE, AC, STARTING AT 25 C
AMBIENT IN TRANSFORMER OIL WITH NO INITIAL LOAD)



Made in USA

For more information contact
Componentssupport@ermco-eci.com
or call (423)638-2302
www.ermco-eci.com

ERMCO Components Inc.
1607 Industrial Road
Greeneville, TN 37745



Phone: (423) 638-2302
Toll Free: (877) 267-1855
Fax (423) 636-6492