



Single Phase Pole Mounted Distribution Transformer

Engineered for Performance. Built for the Grid.

Rev 12/10/25

Scan for a digital copy
of this brochure



Products Built Beyond Standards


Discover Transformers and Components Built to Keep Your Community Powered.

We ensure that families and businesses have the power they need. Every ERMCO Distribution Transformer and Component is engineered for lasting performance and proven reliability to keep the world powered in even the toughest conditions.

With unparalleled build quality and customer support, see why customers worldwide partner with ERMCO when it matters most.



ERMCO's Single Phase Pole Mounted distribution transformers are designed and manufactured in compliance with all applicable IEEE and RUS standards. All transformers are oil-filled, 65°C rise, and designed for usual service conditions per IEEE C57.12.20.

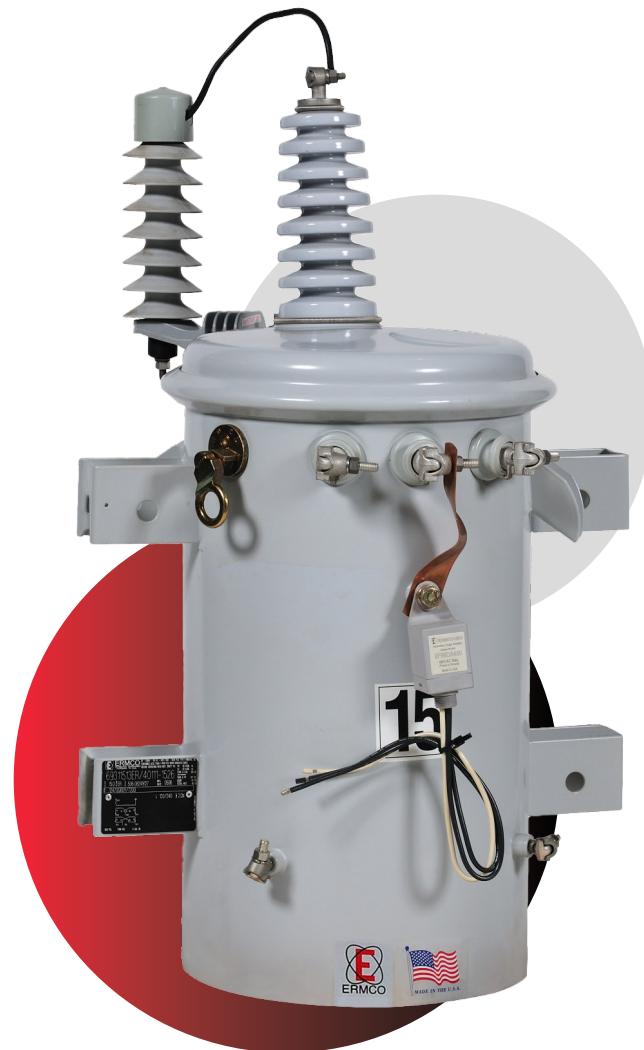

Types of Single Phase Pole Mounted Transformers

- ERMCO pole mounted transformers are categorized by type and class.
- Type identifies the protection of the transformer.
- Class identifies the number of high voltage bushings, mounting positions, and lightning arresters when required.

Class	# H.V. Bushings	# Hanger Brackets
A	2	1
B1	2	1
B2	-	1
B3	-	2

Type	Class	# Lightning Arresters	# Weak Link Fuse	#External Flipper Fuse	#L.V. Breaker
Conv.	All	0	0	0	0
CSP	A	2	2	0	1
CSP	B1	1	2	0	1
CSP	B2, B3	1	1	0	1
CP	A, B1	0	2	0	1
SP	A	1	1	0	0
SP	B1, B2, B3	1	1	0	0
SP Combo	B2, B3	1	0	1	0

Product Features

Tanks:

- External welds are 100% coverage for added strength and corrosion withstand.
- Lift ears allow sling lifting while the unit is still banded to the pallet
- Tank bottom weld is recessed for added protection.



Bushings:

- Secured with grip nuts for uniform pressure.
- Tightened with torque wrenches for consistent leak-free performance.
- Gaskets made of nitrile rubber for long life.

Corrosion Protection:

- Paint finish exceeds all IEEE requirements, including 160in-lb impact, 2000-hour salt spray, 1000-hours QUV, and 20-cycle SCAB.
- Cover band hardware is non-corrosive.
- A "coastal" tank is available with 304 stainless threaded pads, lift ears, and hardware.
- A complete 304L stainless vessel is available for severe corrosive environments.

kVA	H.V.	BIL (kV)	L.V.
1/2	2400	60	120/240
1	4160	75	240/480
1 1/2	4800	95	
3	7200	95	
5	7620	95	
7.5	7970	95	
10	11400	95 or 125	
15	12000	95 or 125	
25	13200	95 or 125	
37.5	13800	95 or 125	
50	14400	125	
75	19920	125 or 150	
100			
167			
250			
333			
500			

**Built
to Higher
Standards with a
Durable Powder-
Coat Finish for
Lasting**

kVA and Standard Voltage Offerings


- All standard tap configurations available.
- Dual voltage available in most combinations.
- Dual voltage with taps in series position only.
- Dual voltage: Highest BIL applies to both voltages.
- Additional voltages may be available; consult with factory.
- Impedance and loss options available in most designs.

Product Range

Types Offered	CONV	CSP	CP	SP
kVA Ratings	½-500	5-167	5-167	½-500
High Voltage	2.4-19.9 kV	2.4-19.9 kV	2.4-19.9 kV	2.4-19.9 kV
BIL	150 kV (max)	150 kV (max)	150 kV (max)	150 kV (max)
Low Voltage	600 V (max)	600 V (max)	600 V (max)	600 V (max)

Optional Product Accessories

Accessory	Default Standard	Available
H.V. Fuse	Weak Link	External flipper kit, under oil CL
L.V. Breaker	Thermal Trip <25 kVA Mag & Thermal >37.5 kVA	Magnetic & thermal trip 25 kVA, emergency overload, signal light
Arrester	Polymer Direct Connect Normal Duty Metal Oxide	Polymer, normal or heavy duty, can be brand specific, under oil MOV, LV surge arrester
Wildlife Protection	3 KV Insulated Cover	10 KV or 15 KV cover, birdguards
H.V. Bushings	Porcelain Eyebolt	Extra creep porcelain, handwheel Anti-Tracking Device
L.V. Bushings	Polymer: Eyebolt 1/2 - 100 kVA Spade 167 - 500 kVA	Porcelain Variety of eyebolts Variety of spades
Markings	KVA Decal	Generic or customer specific decals, bar codes, stenciling customer stock codes, serial numbering, and other markings
Taps/Dual Voltage	External Cap Wrench Handle	External lever handle or hook stick handle, dual voltage with taps in series position only.

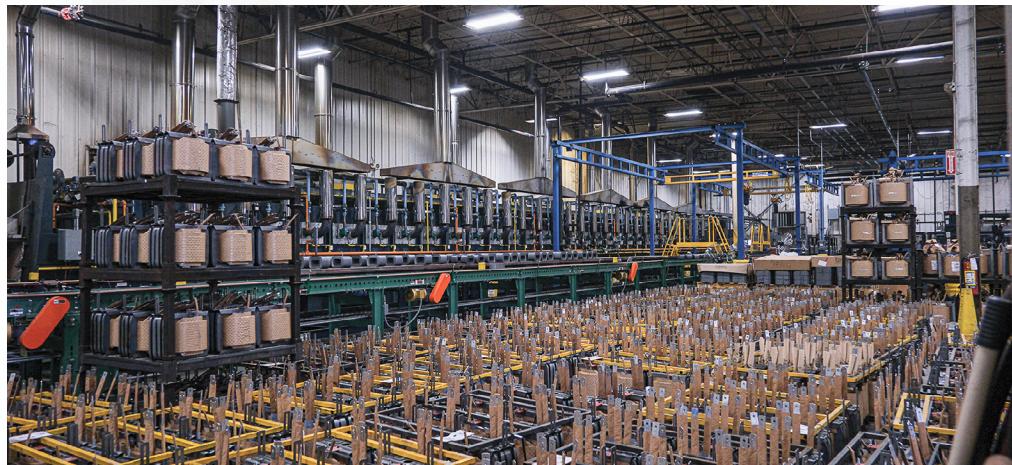

**A Full
Product Range
for Your
Grid.**

Quality and Reliability

- All electrical testing is per IEEE standards.
- Many other tests are made for control purposes, such as core loop loss and exciting current, coil ratio and polarity, oil properties, and multiple oil leak checks.
- ERMCO is an ISO9001 certified company.


Warranty

- 3-year warranty on CSP.
- 2-year warranty on Conventional.
- Coverage includes round-trip transportation between the purchaser's shipping dock and the repair facility.



**Built for
Life on
the Line.**

Optional Equipment	CONV	CSP	CP	SP
H.V. Taps	●	●	●	●
Dual Voltage	●	●	●	●
Internal Expulsion Fuse Link		●	●	
External CL Fuse	●	●	●	●
Internal CL Fuse	●	●	●	●
Secondary Circuit Breaker		●	●	
Under Oil MOV Arrester	●	●	●	●
External Arrester	●	●	●	●

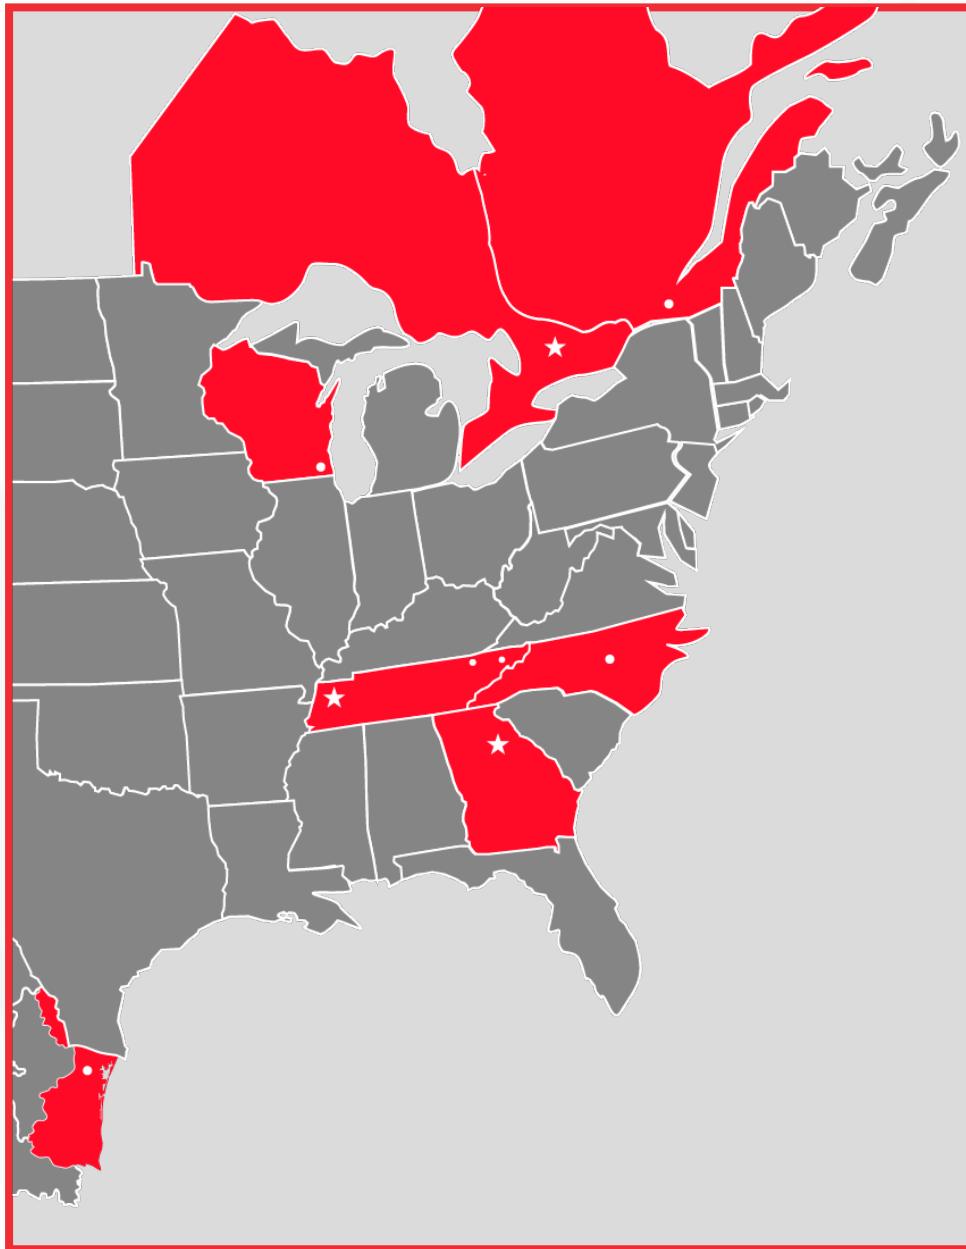

ERMCO-ECI
2225 Industrial Road,
Dyersburg, TN 38024
731-285-9121
WWW.ERMCO-ECI.COM

ERMCO COMPONENTS
1607 Industrial Road,
Greeneville, TN 37745
423-636-6400

ERMCO COMPONENTS
13622 101st Street,
Bristol, WI 53104

ERMCO COMPONENTS
Seccion 44A Tercera Unidad del Bajo Rio
San Juan S/N
Col. Parque Industrial Reynosa
Reynosa, Tam. Mexico CP 88780
WWW.ERMCO-ECI.CO

PIONEER TRANSFORMERS
612 Bernard Road
Granby, Quebec J2J 0H6
450-378-9018
WWW.PIONEERTRANSFORMERS.COM

POWER PARTNERS
200 Newton Bridge Road,
Athens, Georgia 30607
706-548-3121
WWW.POWERPARTNERS-USA.COM

GRIDBRIDGE
7001 Pinecrest Road
Raleigh, NC 27613
984-500-5370
WWW.GRID-BRIDGE.COM

ERMCO DRY TYPE TRANSFORMERS
1125 Walnut Avenue
Celina, TN 38551
931-243-4717
WWW.VF-TRANSFORMER.COM



ERMCO-ECI
2225 Industrial Road,
Dyersburg, TN 38024

Need help choosing the right transformer?
Go to our site below to explore our interactive map and connect with a sales expert in your state.

View Our Sales Map

<https://www.ermco-eci.com/contact-us/>